

I-WALL

- Rated power 24/230V
- IP66
- Coated aluminium/RVS
- orientation light
- Lifetime >50000 hour
- Corrosion proof
- Light intensity customizable
- RVS wall bracket & led driver included


Output data



Watt	Color temperature	Lumen	Article number
5W	2700K	600lm	1.02.15.00



Dimensions I-wall

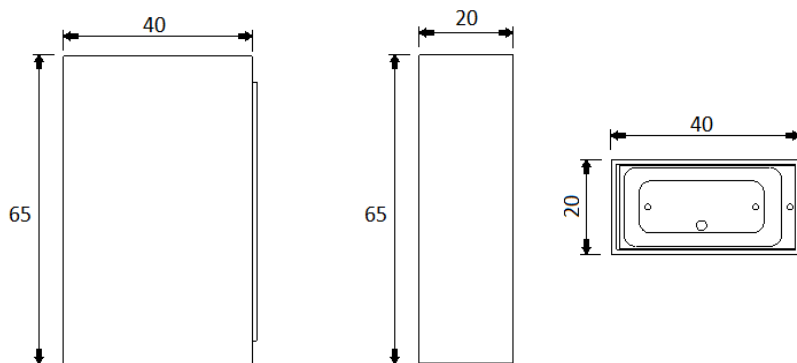

Led-e-Lux