


MINI SPOT DIFFUUS

- | | | | |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Rated power 24V • IP66 | <ul style="list-style-type: none"> • Anodized aluminium • Orientation light | <ul style="list-style-type: none"> • Lifetime >50000 hour • Corrosion proof | <ul style="list-style-type: none"> • Light range up to 3m • Transformer for 230V |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|

Output data




Watt	Color temperature	Lumen	Article number
2W	2700K	120lm	1.02.01.50



Accessories



Product	Article number
Gel connector	1.02.99.11
Driver	4.04.01.13
Spike	1.02.91.02

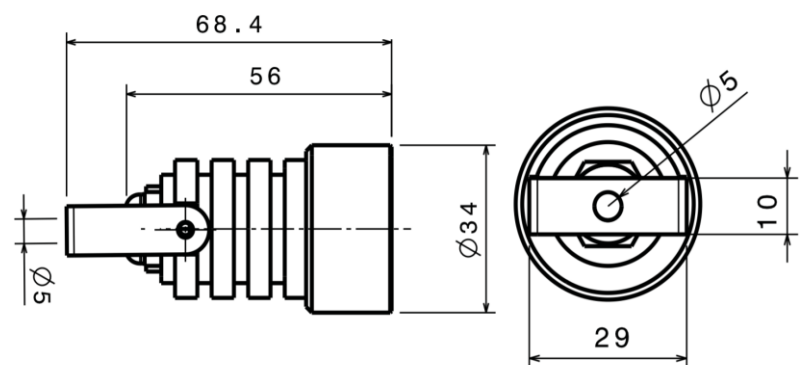


Led-e-Lux


MINI SPOT INBOUW

- Rated power 24V
- IP66
- Anodized aluminium
- orientation light
- Lifetime >50000 hour
- Corrosion proof
- Light range up to 3m
- Transformer for 230V

Output data

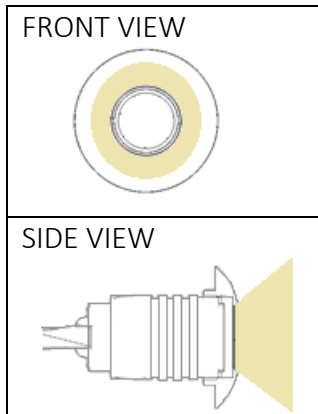


Watt	Color temperature	Lumen	Article number
2W	2700K	120lm	1.02.02.00

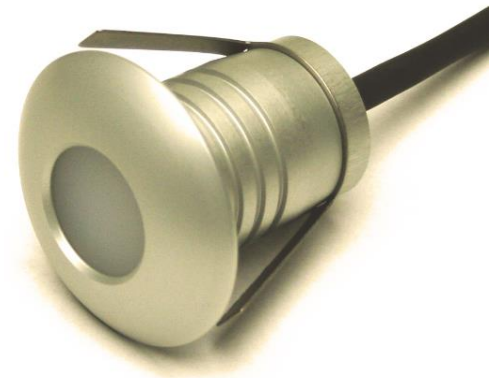

Accessories



Product	Article number
Gel connector	1.02.99.11
Driver	4.04.01.13
Mounting tube	40mm PVC tube

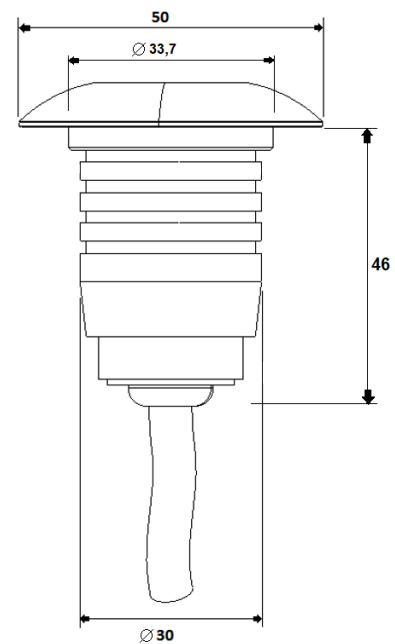


Led-e-Lux

MINI SPOT VINTAGE

- | | | | |
|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Rated power 24/230V • IP66 | <ul style="list-style-type: none"> • Anodized aluminium • Orientation light | <ul style="list-style-type: none"> • Lifetime >50000 hour • Corrosion proof | <ul style="list-style-type: none"> • Light range up to 3m • Up lighting |
|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|

Output data

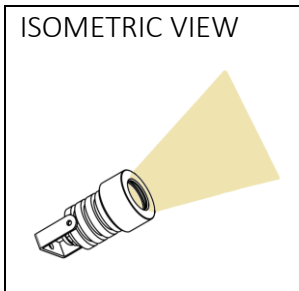


Watt	Color temperature	Lumen	Article number
3W	2700K	360lm	1.02.01.00



Accessories



Product	Article number
Gel connector	1.02.99.11
Driver	4.04.01.13
Spike	1.02.91.02

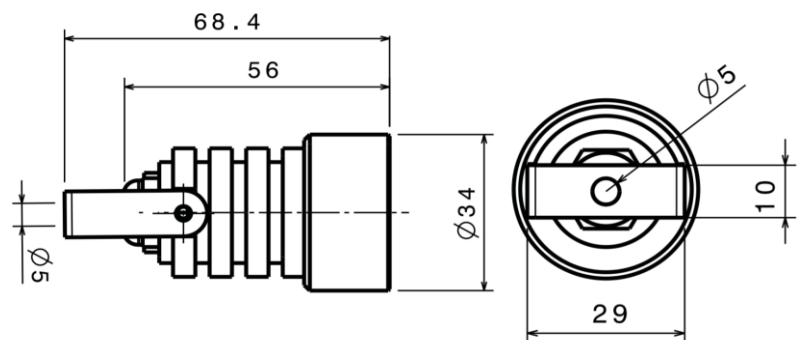

Led-e-Lux